

MANUAL 1 - USER GUIDE

CONCEALED CISTERN

PARTS LIST, DIMENSIONS AND INSTALLATION STEPS

WARRANTY INFORMATION:



10 YEAR LIMITED WARRANTY

INSTALLATION FRAME AND CONCEALED

CISTERN TANK
HOUSEHOLD USE



5 YEAR LIMITED WARRANTY

INSTALLATION FRAME AND CONCEALED CISTERN TANK

COMMERCIAL USE



2 YEAR LIMITED WARRANTY

MECHANICAL FLUSH/ ACCESS PLATES



2 YEAR LIMITED WARRANTY

INLET AND OUTLET VALVE PRODUCTS

WARRANTY EXCLUDES:


Damage caused by improper installation of the product, abnormal use, storage under abnormal conditions, and exposure to excessively high or low environmental conditions;

Product failure or component damage caused by the use of corrosive detergent or disinfectant.




CONCEALED CISTERN USER GUIDE



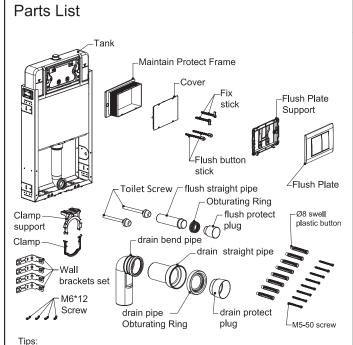

\(^\sigma\) Please install this product before paving tiles. Before installing, confirm the installation location and confirm the horizon after the completion of the project. Draw the horizon $\stackrel{\circ}{$}$ on the installation wall. This product is installed as a baseline $\stackrel{\circ}{$}$ for the installation height.


Product specifications




Note: Slim type can be installed in the 103mm thick wall.


Installation Steps

1.False wall (half false wall)




2. Assemble wall brackets to the metal frame

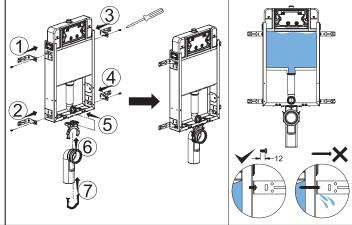

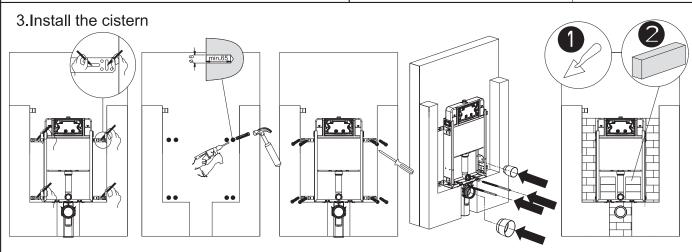


NOTE: the size unit is mm, $\frac{9}{2}$ = the floor height after the project. The fill water pressure and stop filling pressure is between 0.01MPa-2.0MPa, water temperature: 2°C-45°C, flush volume can be adjustable.

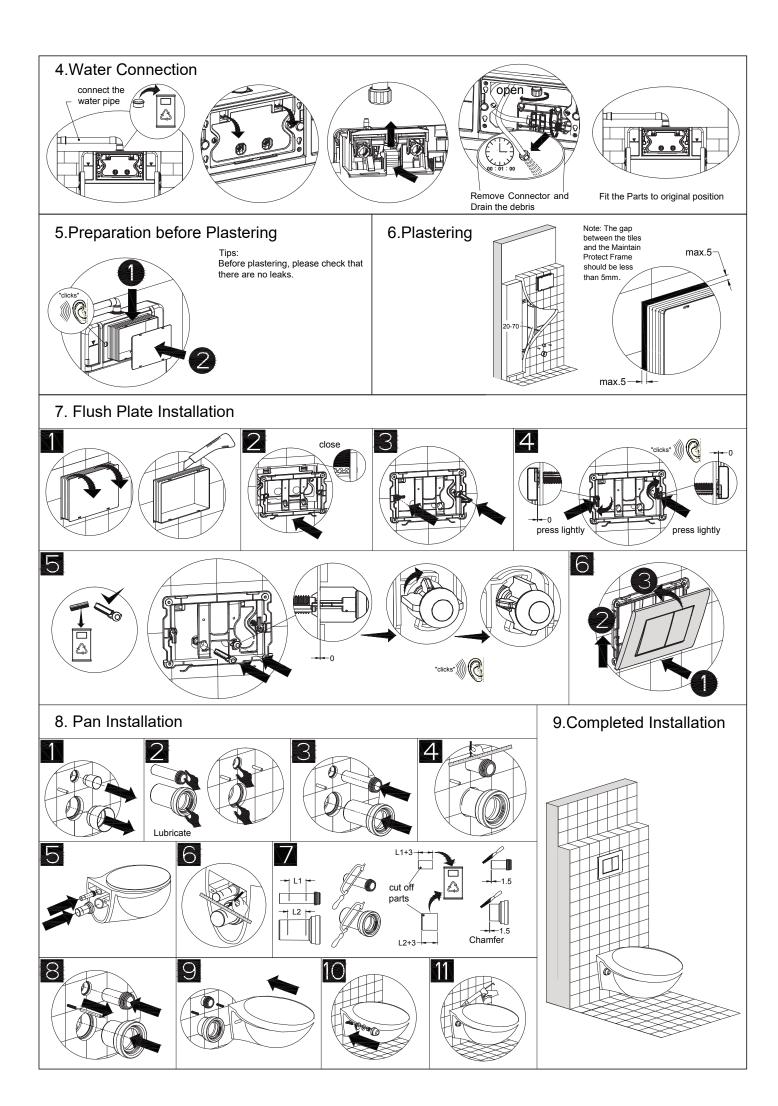



36 Peter Barlow Street Bellville | Cape Town South Africa + 27 (21) 531 9848 info@lecicosa.co.za www.lecicosa.co.za

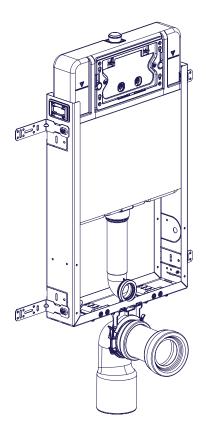

MANUAL 2 - MAINTENANCE GUIDE

CONCEALED CISTERN

WARRANTY INFORMATION:



10 YEAR LIMITED WARRANTY

INSTALLATION FRAME AND CONCEALED CISTERN TANK

HOUSEHOLD USE



5 YEAR
LIMITED WARRANTY

INSTALLATION FRAME AND CONCEALED CISTERN TANK

COMMERCIAL USE



2 YEAR LIMITED WARRANTY

MECHANICAL FLUSH/ ACCESS PLATES



LIMITED WARRANTY

INLET AND OUTLET VALVE PRODUCTS

WARRANTY EXCLUDES:

Damage caused by improper installation of the product, abnormal use, storage under abnormal conditions, and exposure to excessively high or low environmental conditions;

 $\label{product} \mbox{Product failure or component damage caused by the use of corrosive detergent or disinfectant.}$



CONCEALED CISTERN MAINTENANCE GUIDE



